



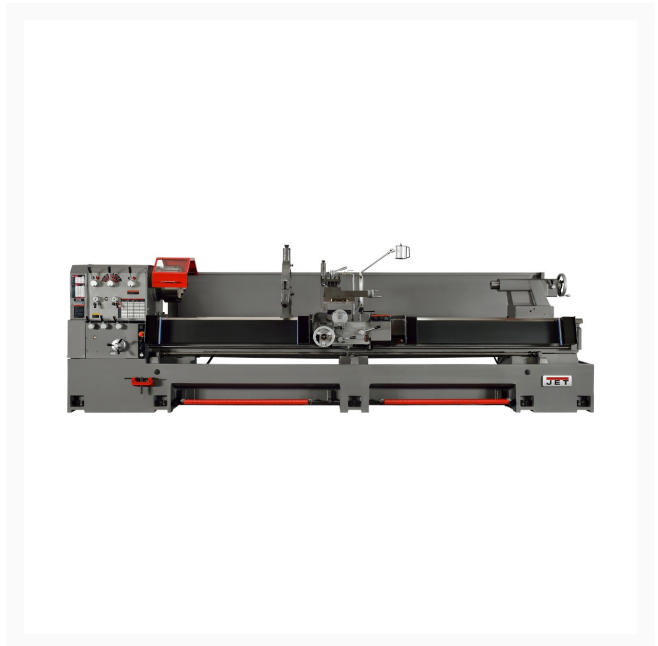

26" x 80" 4.5" Bore Industrial Gear Head Lathe(GH-2680ZH)

Product Images

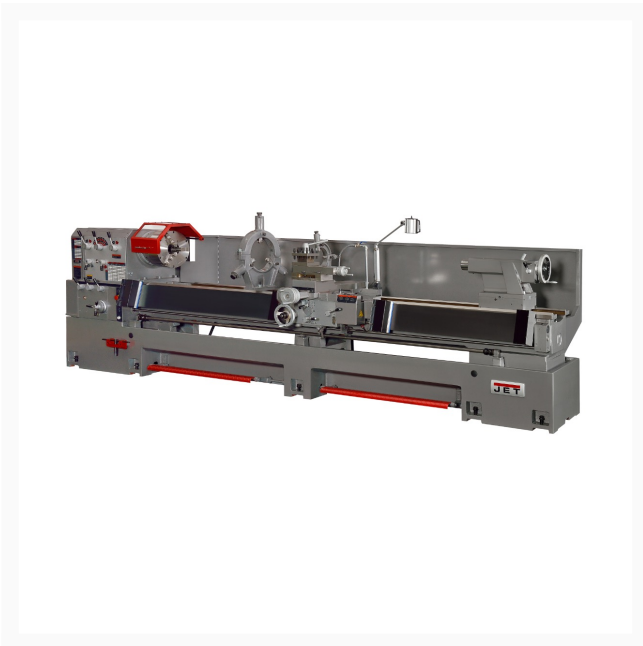

Additional Information

Stock Number	JT1-2717
Carriage Travel (In.)	65
Compound Slide Travel (In.)	8
Cross Slide Travel (In.)	14.75
Diametral Pitch Threads Number	21
Distance Between Centers (In.)	80
Drive	Geared Head
Length of Gap (In.)	7-2/3
Max Tool Size (In.)	5/8 x 5/8
Model Number	GH-2680ZH
Modular Pitch Threads Number	18
Modular Pitch Threads Range	0.3 - 3.5
Motor Phase	3
Motor Power (HP)	15
Motor Voltage (V.)	230
Number of Inch Threads	45
Number of Longitudinal and Cross Feed Rates	40
Number of Metric Threads	39
Number of Spindle Speeds	12
Prop 65	Cancer and Reproductive Harm
Range of Cross Feeds (IPR)	0.001" - 0.0094"
Range of Inch Threads (TPI)	2-56
Range of Longitudinal Feeds (IPR)	0.002" - 0.032"
Range of Metric Threads	0.5 - 14mm

Range of Spindle Speeds (RPM)	10-1000 RPM
Size	26x80
Spindle Bore (In.)	4-1/8
Spindle Mount	D1-11
Spindle Taper	MT-7
Spindle Taper with Sleeve	MT-5
Style (Type)	Engine - Large Spindle Bore
Swing Over Bed (In.)	26
Swing Over Cross Slide (In.)	17.3"
Swing Through Gap (In.)	35"
Tailstock Spindle Travel (In.)	3-3/4
Taper in Tailstock Spindle	MT-5
Warranty	2 Year
Width of Bed (In.)	15.75"
Gross Weight	6724
Net Weight	6283