




E-1236VS With ACU-RITE 303 DRO With Collet Closer

Product Images

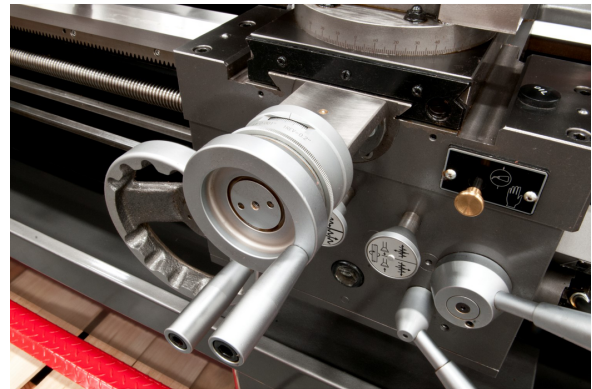

ANTI-FLOAT DESIGN ELIMINATES BACKLASH IN THE CROSS SLIDE

Short Description

E-1236VS With ACU-RITE 303 DRO With Collet Closer

Additional Information

| | |
|---|------------------------------|
| Stock Number | JT9-892313 |
| Compound Slide Travel (In.) | 3-1/2 |
| Drive | EVS |
| Length of Gap (In.) | 9-1/2 |
| Max Tool Size (In.) | 1/2 x 1/2 |
| Model Number | E-1236VS |
| Motor (HP) | 2HP, 230V,3ph |
| Number of Inch Threads | 34.0000 |
| Number of Longitudinal and Cross Feed Rates | 50 |
| Number of Metric Threads | 33.0000 |
| Overall Dimensions (L x W x H) (In.) | 71 x 30 x 60 |
| Prop 65 | Cancer and Reproductive Harm |
| Range of Cross Feeds (IPR) | 0.0005 - 0.015 |
| Range of Inch Threads (TPI) | 2 - 56 |
| Range of Longitudinal Feeds (IPR) | 0.0016 - 0.046 |
| Range of Metric Threads | 0.5 - 12 |
| Range of Spindle Speeds (RPM) | 0 - 2,000 |
| Size | 12 x 36 |
| Spindle Bore (In.) | 1-9/16 |
| Spindle Mount | D1-4 |
| Spindle Taper with Sleeve | MT-5 |
| Steady Rest Capacity (In.) | 1/4 - 2-1/2 |
| Style (Type) | ELITE EVS |
| Swing Over Bed (In.) | 12 |

| | |
|--------------------------------|--------------|
| Swing Over Cross Slide (In.) | 7-5/16 |
| Swing Through Gap (In.) | 17-1/2 |
| Tailstock Spindle Travel (In.) | 4 |
| Taper in Tailstock Spindle | MT-3 |
| Warranty | 3 Year Elite |
| Weight (Lbs.) | 1212 |
| Width of Bed (In.) | 7-1/2 |
| Gross Weight | 1477.0 |

