




E-1236VS With ACU-RITE 303 CSS DRO With Taper Attachment and Collet Closer

Product Images

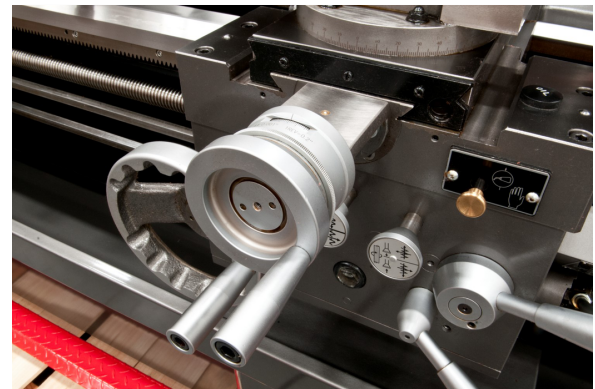

ANTI-FLOAT DESIGN ELIMINATES BACKLASH IN THE CROSS SLIDE

Short Description

E-1236VS With ACU-RITE 303 CSS DRO With Taper Attachment and Collet Closer

Additional Information

Stock Number	JT9-892318
Compound Slide Travel (In.)	3-1/2
Drive	EVS
Length of Gap (In.)	9-1/2
Max Tool Size (In.)	1/2 x 1/2
Model Number	E-1236VS
Motor (HP)	2HP, 230V,3ph
Number of Inch Threads	34.0000
Number of Longitudinal and Cross Feed Rates	50
Number of Metric Threads	33.0000
Overall Dimensions (L x W x H) (In.)	71 x 30 x 60
Prop 65	Cancer and Reproductive Harm
Range of Cross Feeds (IPR)	0.0005 - 0.015
Range of Inch Threads (TPI)	2 - 56
Range of Longitudinal Feeds (IPR)	0.0016 - 0.046
Range of Metric Threads	0.5 - 12
Range of Spindle Speeds (RPM)	0 - 2,000
Size	12 x 36
Spindle Bore (In.)	1-9/16
Spindle Mount	D1-4
Spindle Taper with Sleeve	MT-5
Steady Rest Capacity (In.)	1/4 - 2-1/2
Style (Type)	ELITE EVS
Swing Over Bed (In.)	12

Swing Over Cross Slide (In.)	7-5/16
Swing Through Gap (In.)	17-1/2
Tailstock Spindle Travel (In.)	4
Taper in Tailstock Spindle	MT-3
Warranty	3 Year Elite
Weight (Lbs.)	1212
Width of Bed (In.)	7-1/2
Gross Weight	1477.0

