




E-1340VS With ACU-RITE 303 CSS DRO With Taper Attachment and Collet Closer

Product Images

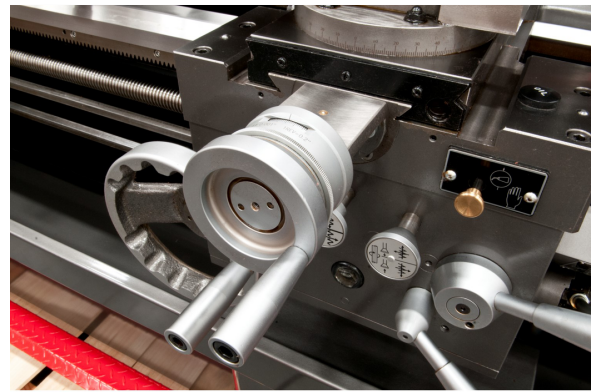

ANTI-FLOAT DESIGN ELIMINATES BACKLASH IN THE CROSS SLIDE

Short Description

E-1340VS With ACU-RITE 303 CSS DRO With Taper Attachment and Collet Closer

Additional Information

Stock Number	JT9-892418
Amperage Draw @ 230V 3Ph	19
Compound Slide Travel (In.)	3-1/2
Drive	EVS
Length of Gap (In.)	9
Max Tool Size (In.)	5/8 x 5/8
Model Number	E-1340VS
Motor (HP)	3 HP, 230V, 3Ph
Number of Inch Threads	40.0000
Number of Longitudinal and Cross Feed Rates	80
Number of Metric Threads	22.0000
Overall Dimensions (L x W x H) (In.)	67 x 30 x 57
Prop 65	Cancer and Reproductive Harm
Range of Cross Feeds (IPR)	0.0003 - 0.01
Range of Inch Threads (TPI)	4 - 112
Range of Longitudinal Feeds (IPR)	0.0012 - 0.0294
Range of Metric Threads	0.45 - 7.5
Range of Spindle Speeds (RPM)	0 - 2,200
Size	13 x 40
Spindle Bore (In.)	1-1/2
Spindle Mount	D1-4
Spindle Taper with Sleeve	MT-5
Steady Rest Capacity (In.)	1/4 - 2-3/4
Style (Type)	ELITE EVS

Swing Over Bed (In.)	13
Swing Over Cross Slide (In.)	7-5/8
Swing Through Gap (In.)	19
Tailstock Spindle Travel (In.)	4-3/4
Taper in Tailstock Spindle	MT-3
Warranty	3 Year Elite
Weight (Lbs.)	1433
Width of Bed (In.)	8-1/2
Gross Weight	1697.0

