




EGH-1740 With ACU-RITE 203 DRO With Taper Attachment

Product Images

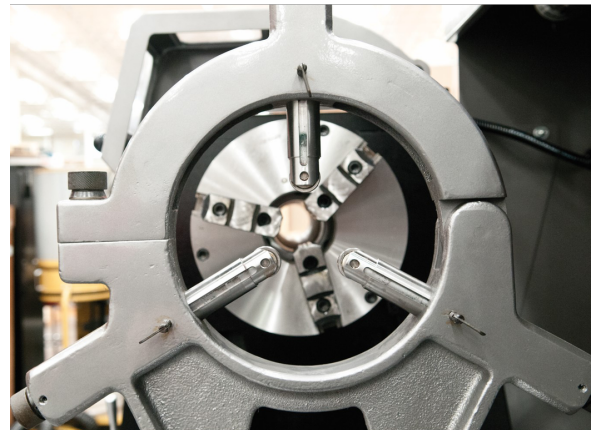

STEADY REST FEATURES DOUBLE SEALED BALL BEARING GUIDES FOR SMOOTH MATERIAL MOVEMENTS

Short Description

EGH-1740 With ACU-RITE 203 DRO With Taper Attachment

Additional Information

Stock Number	JT9-892504
Amperage Draw @ 230V 3Ph	22
Amperage Draw @ 460V 3Ph	11
Compound Slide Travel (In.)	6-2/7
Diametral Pitch Threads Number	21.0000
Drive	Geared Head
Length of Gap (In.)	7-2/3
Max Tool Size (In.)	1 x 1
Model Number	EGH-1740
Modular Pitch Threads Number	18.0000
Number of Inch Threads	45.0000
Number of Metric Threads	39.0000
Number of Spindle Speeds	12
Overall Dimensions (L x W x H) (In.)	94 x 44 x 68
Prop 65	Cancer and Reproductive Harm
Range of Cross Feeds (IPR)	0.00075 - 0.02
Range of Inch Threads (TPI)	2 - 72
Range of Longitudinal Feeds (IPR)	0.0015 - 0.04
Range of Metric Threads	0.2 - 14
Range of Spindle Speeds (RPM)	36 - 1,800
Size	17 x 40
Spindle Bore (In.)	3-1/8
Spindle Mount	D1-6
Spindle Taper with Sleeve	MT-5
Steady Rest Capacity (In.)	3/8 - 6-3/4

Style (Type)	Engine
Swing Over Bed (In.)	17
Swing Over Cross Slide (In.)	11
Tailstock Spindle Travel (In.)	5
Warranty	3 Year Elite
Weight (Lbs.)	3747
Width of Bed (In.)	12
Gross Weight	4409.0

