




JTM-1050VS2 Mill With 3-Axis ACU-RITE 203 DRO (Knee) With X and Y-Axis Powerfeeds

Product Images

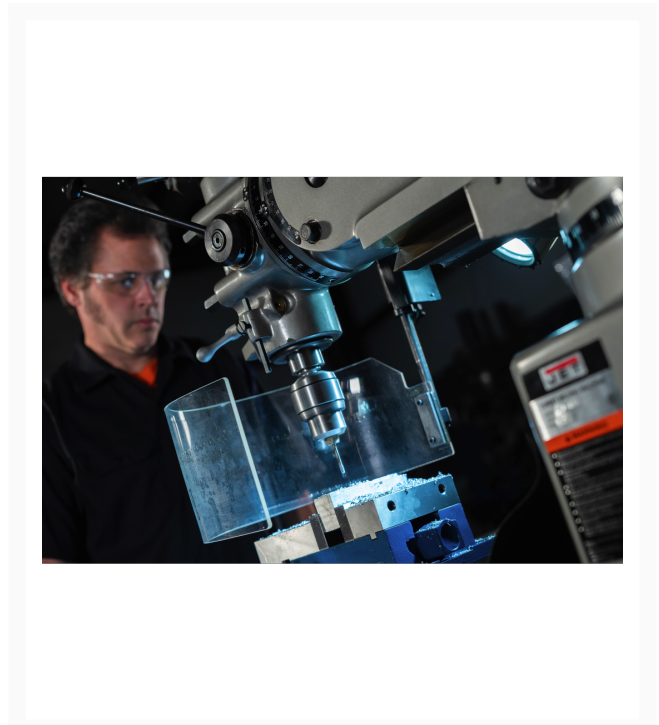

Short Description

JTM-1050 Mill With 3-Axis ACU-RITE 203 DRO (Knee) With X and Y-Axis Powerfeeds

Additional Information

| | |
|--|------------------------------|
| Stock Number | JT9-690256 |
| Collet Capacity | 1/8 - 7/8 |
| Distance Spindle to Column (Max.) (In.) | 26 |
| Max Distance Spindle to Table (In.) | 19 |
| Model Number | JTM-1050VS2 |
| Motor (HP) | 3 HP, 230/460V, 3Ph |
| Number of Axis | 3 (Knee) |
| Overall Dimensions (L x W x H) (In.) | 96 x 78 x 88 |
| Powerfeed | X and Y-Axis |
| Prop 65 | Cancer and Reproductive Harm |
| Quill Diameter (In.) | 3-3/8 |
| Quill Down Feed Rates (IPR) | .0015 - .003 - .006 |
| Range of Spindle Speeds (RPM) | 70 - 3,800 |
| Spindle Taper (In. x TPI) | R-8 |
| Spindle Travel (In.) | 5 |
| Style (Type) | Variable Speed R8 |
| T-Slot Centers (In.) | 2-1/2 |
| Table Cross Travel (In.) | 15-1/4 |
| Table Longitudinal Travel (In.) | 35 |
| Table Longitudinal Travel With Powerfeed (In.) | 29-3/4 |
| Table Size (L x W) (In.) | 10 x 50 |
| Travel of Knee (In.) | 14-1/4 |
| Travel of Ram (In.) | 20-1/2 |
| Warranty | 2 Year |

| | |
|-----------------------------------|--------|
| Work Table Weight Capacity (Lbs.) | 720 |
| Gross Weight | 2900.0 |
| Net weight | 2751.0 |