




# JTM-1050VS2 Mill With ACU-RITE 203 DRO With X, Y and Z-Axis Powerfeeds

## Product Images

---

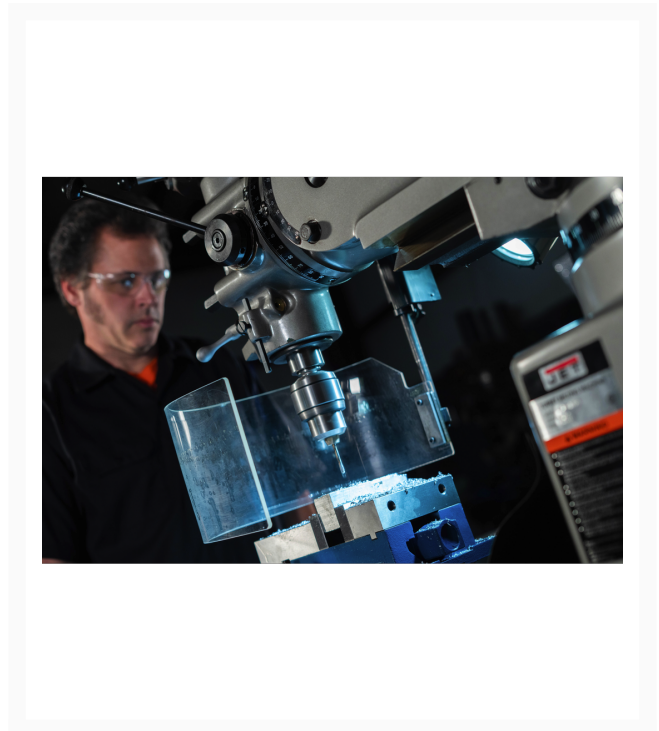

## Short Description

---

JTM-1050 Mill With ACU-RITE 203 DRO With X, Y and Z-Axis Powerfeeds

## Additional Information

---

Stock Number	JT9-690450
Collet Capacity	1/8 - 7/8
Distance Spindle to Column (Max.) (In.)	26
Max Distance Spindle to Table (In.)	19
Model Number	JTM-1050VS2
Motor (HP)	3 HP, 230/460V, 3Ph
Number of Axis	2
Overall Dimensions (L x W x H) (In.)	96 x 78 x 88
Powerfeed	X, Y and Z-Axis
Prop 65	Cancer and Reproductive Harm
Quill Diameter (In.)	3-3/8
Quill Down Feed Rates (IPR)	.0015 - .003 - .006
Range of Spindle Speeds (RPM)	70 - 3,800
Spindle Taper (In. x TPI)	R-8
Spindle Travel (In.)	5
Style (Type)	Variable Speed R8
T-Slot Centers (In.)	2-1/2
Table Cross Travel (In.)	15-1/4
Table Longitudinal Travel (In.)	35
Table Longitudinal Travel With Powerfeed (In.)	29-3/4
Table Size (L x W) (In.)	10 x 50
Travel of Knee (In.)	14-1/4
Travel of Ram (In.)	20-1/2
Warranty	2 Year

Work Table Weight Capacity (Lbs.)	720
Gross Weight	3100.0
Net weight	3100.0