




EVS-949 Mill with 3-Axis Newall DP700 (Knee) DRO and X, Y-Axis JET Powerfeeds

Product Images

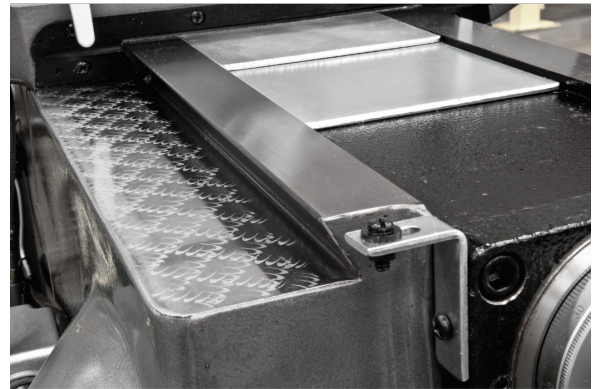

HAND SCRAPED WAYS FOR GREATER OIL RETENTION AND SMOOTH MOVEMENTS

Short Description

EVS-949 Mill with 3-Axis Newall DP700 (Knee) DRO and X, Y-Axis JET Powerfeeds

Additional Information

Stock Number	JT9-894368
Amperage Draw @ 230V 3Ph	18
Collet Capacity	1/8 - 7/8
Distance Spindle to Column (Max.) (In.)	21-2/5
Max Distance Spindle to Table (In.)	18-3/4
Model Number	ETM-949EVS
Motor (HP)	3 HP, 230V, 3 Ph
Number of Axis	3 (Knee)
Overall Dimensions (L x W x H) (In.)	68 x 63 x 84
Prop 65	Cancer
Quill Diameter (In.)	3-3/8
Quill Down Feed Rates (IPR)	0.0015 - 0.003 - 0.006
Range of Spindle Speeds (RPM)	60 - 5,000
Spindle Taper (In. x TPI)	R-8
Spindle Travel (In.)	5
Style (Type)	Variable Speed
T-Slot Centers (In.)	2-1/2
Table Cross Travel (In.)	12
Table Longitudinal Travel (In.)	36
Table Size (L x W) (In.)	9 x 49
Travel of Knee (In.)	16
Travel of Ram (In.)	14
Warranty	3 Year Elite
Weight (Lbs.)	2300
Work Table Weight Capacity (Lbs.)	550

Gross Weight

2450.0

