




# E-1236VS With ACU-RITE 203 DRO With Taper Attachment and Collet Closer

## Product Images

---

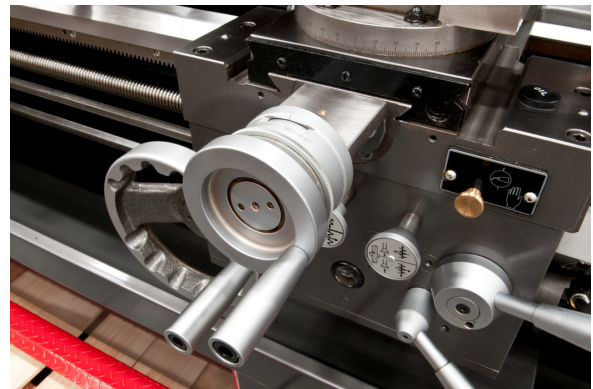

ANTI-FLOAT DESIGN ELIMINATES BACKLASH IN THE CROSS SLIDE

## Short Description

---

E-1236VS With ACU-RITE 203 DRO With Taper Attachment and Collet Closer

## Additional Information

|   |                              |
|---|------------------------------|
| Stock Number                                | JT9-892306                   |
| Compound Slide Travel (In.)                 | 3-1/2                        |
| Drive                                       | EVS                          |
| Length of Gap (In.)                         | 9-1/2                        |
| Max Tool Size (In.)                         | 1/2 x 1/2                    |
| Model Number                                | E-1236VS                     |
| Motor (HP)                                  | 2HP, 230V,3ph                |
| Number of Inch Threads                      | 34.0000                      |
| Number of Longitudinal and Cross Feed Rates | 50                           |
| Number of Metric Threads                    | 33.0000                      |
| Overall Dimensions (L x W x H) (In.)        | 71 x 30 x 60                 |
| Prop 65                                     | Cancer and Reproductive Harm |
| Range of Cross Feeds (IPR)                  | 0.0005 - 0.015               |
| Range of Inch Threads (TPI)                 | 2 - 56                       |
| Range of Longitudinal Feeds (IPR)           | 0.0016 - 0.046               |
| Range of Metric Threads                     | 0.5 - 12                     |
| Range of Spindle Speeds (RPM)               | 0 - 2,000                    |
| Size  | 12 x 36                      |
| Spindle Bore (In.)                          | 1-9/16                       |
| Spindle Mount                               | D1-4                         |
| Spindle Taper with Sleeve                   | MT-5                         |
| Steady Rest Capacity (In.)                  | 1/4 - 2-1/2                  |
| Style (Type)                                | ELITE EVS                    |
| Swing Over Bed (In.)                        | 12                           |

|                                |              |
|--------------------------------|--------------|
| Swing Over Cross Slide (In.)   | 7-5/16       |
| Swing Through Gap (In.)        | 17-1/2       |
| Tailstock Spindle Travel (In.) | 4            |
| Taper in Tailstock Spindle     | MT-3         |
| Warranty                       | 3 Year Elite |
| Weight (Lbs.)                  | 1212         |
| Width of Bed (In.)             | 7-1/2        |
| Gross Weight                   | 1477.0       |

